

preair


SINCE 1999


PRODUCT CATALOG

For Australia, Europe and Asia Pacific

 Quality Guarantee



 Authentication Certificate

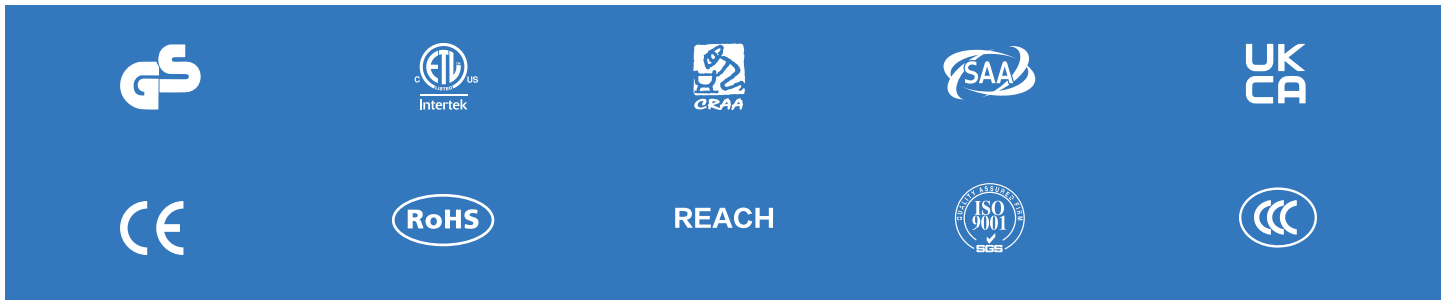

ROTOMOLD (PE) SERIES

Robust housing with convenient handle & wheels design, plus smart digital control unit.

ALGR65

WATER-DAMAGE DEHUMIDIFIER



10A



Custom Color



Wifi



LCD Panel



APP Control

Power Supply	220-240V/50Hz
Rated Current	3.9A
Rated Power	833 W
Dehumidification Capacity (30°C / 80%RH)/Day	65 L/Day
Working Temperature Range	5°C - 38°C
Humidity Setting	30%RH-90%RH
Product Dimensions	542*313*442mm
Packaging Dimensions	620*430*510mm
Net Weight	32Kg
Gross Weight	35Kg
Refrigerant / Refrigerant Charge	R410A / 600g
Drainage Way	Water Pump
Filter Material	SUS304
Drain Pipe Length	6 M
Loading Quantity(20'/40'/40'HQ)	196 / 404/ 505

ALGR90

WATER-DAMAGE DEHUMIDIFIER



10A



Custom Color



Wifi



LCD Panel



APP Control

Power Supply	220-240V/50Hz
Rated Current	4.7 A
Rated Power	1050 W
Dehumidification Capacity (30°C / 80%RH)/Day	90 L/Day
Working Temperature Range	5°C - 38°C
Humidity Setting	30%RH-90%RH
Product Dimensions	615*425*470 mm
Packaging Dimensions	720*490*526 mm
Net Weight	38 Kg
Gross Weight	41.5 Kg
Refrigerant / Refrigerant Charge	R410A / 550g
Drainage Way	Water Pump
Filter Material	SUS304
Drain Pipe Length	6 M
Loading Quantity(20'/40'/40'HQ)	140 / 292 / 365

ALGR110

WATER-DAMAGE DEHUMIDIFIER



15A



Custom Color



Wifi



LCD Panel



APP Control

Power Supply	220-240V/50Hz
Rated Current	6 A
Rated Power	1291 W
Dehumidification Capacity (30°C / 80%RH)/Day	110 L/Day
Working Temperature Range	5°C - 38°C
Humidity Setting	30%RH-90%RH
Product Dimensions	615*425*470 mm
Packaging Dimensions	720*490*526 mm
Net Weight	40.5 Kg
Gross Weight	43.7 Kg
Refrigerant / Refrigerant Charge	R410A / 730g
Drainage Way	Water Pump
Filter Material	SUS304
Drain Pipe Length	6 M
Loading Quantity(20'/40'/40'HQ)	140 / 292 / 365

ALGR65L

WATER-DAMAGE DEHUMIDIFIER



10A



Custom Color



Wifi



LCD Panel



APP Control

Power Supply	220-240V/50Hz
Rated Current	3.9 A
Rated Power	837 W
Dehumidification Capacity (30°C / 80%RH)/Day	65 L/Day
Working Temperature Range	5°C - 38°C
Humidity Setting	30%RH-90%RH
Product Dimensions	561*473*607 mm
Packaging Dimensions	614*540*648 mm
Net Weight	40.5 Kg
Gross Weight	43.7 Kg
Refrigerant / Refrigerant Charge	R410A / 600g
Drainage Way	Water Pump
Filter Material	SUS304
Drain Pipe Length	6 M
Loading Quantity(20'/40'/40'HQ)	114 / 246 / 328

ALGR130L

WATER-DAMAGE DEHUMIDIFIER



15A



Custom Color



Wifi



LCD Panel



APP Control


Power Supply	220-240V/50Hz
Rated Current	5.7 A
Rated Power	1230 W
Dehumidification Capacity (30°C / 80%RH)/Day	130 L/Day
Working Temperature Range	5°C - 38°C
Humidity Setting	30%RH-90%RH
Product Dimensions	560*589*842 mm
Packaging Dimensions	690*640*880 mm
Net Weight	56.5 Kg
Gross Weight	62.5 Kg
Refrigerant / Refrigerant Charge	R410A / 1300g
Drainage Way	Water Pump
Filter Material	SUS304
Drain Pipe Length	6 M
Loading Quantity(20'/40'/40'HQ)	54 / 108 / 162

COMMERCIAL SERIES DEHUMIDIFIER

Small size with metal housing for portable use purpose, extremely welcomed in commercial market.

HT-500

COMMERCIAL DEHUMIDIFIER

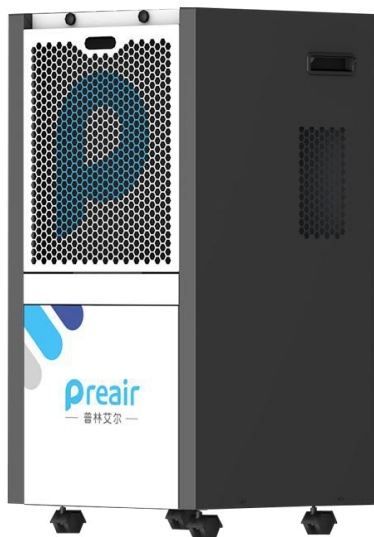

Custom Color



Timer



LCD Panel




Portable

Power Supply	220V/50Hz
Rated Current	3A
Rated Power	650W
Dehumidification Capacity (30°C / 80%RH)/Day	50 L/Day
Working Temperature Range	5°C - 38°C
Humidity Setting	10%RH-95%RH
Product Dimensions	342*435*620 mm
Packaging Dimensions	410*540*665 mm
Net Weight	27Kg
Gross Weight	29Kg
Refrigerant / Refrigerant Charge	R410A / 370 g
Drainage Way	Water tank
Filter Material	Nylon
Drain Pipe Length	1M
Loading Quantity(20'/40'/40'HQ)	180/ 366/ 488

HT-901

COMMERCIAL DEHUMIDIFIER

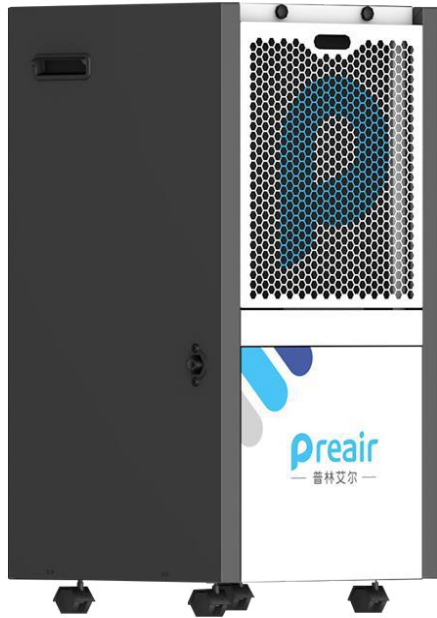

Custom Color



Timer



LCD Panel




Portable

Power Supply	220V/50Hz
Rated Current	3.8 A
Rated Power	820W
Dehumidification Capacity (30°C / 80%RH)/Day	90 L/Day
Working Temperature Range	5°C - 38°C
Humidity Setting	10%RH-95%RH
Product Dimensions	410*436*835 mm
Packaging Dimensions	530*560*885mm
Net Weight	45Kg
Gross Weight	50Kg
Refrigerant / Refrigerant Charge	R22 / 730g
Drainage Way	Water tank
Filter Material	Nylon
Drain Pipe Length	0.15 M
Loading Quantity(20'/40'/40'HQ)	80/ 176/ 264

HT-1380

COMMERCIAL DEHUMIDIFIER

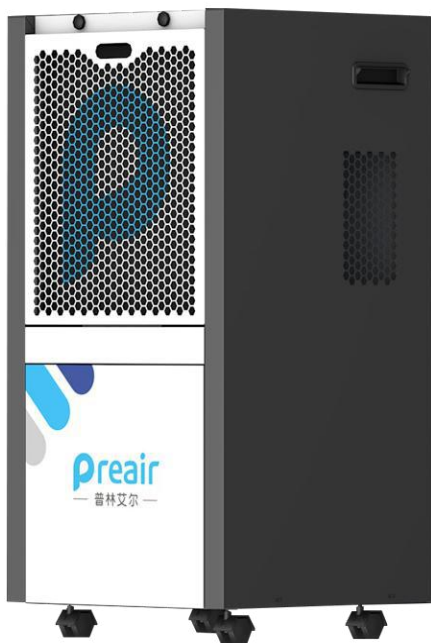

Custom Color



Timer



LCD Panel



Portable

Power Supply	220V/50Hz
Rated Current	5.5A
Rated Power	1200W
Dehumidification Capacity (30°C / 80%RH)/Day	138L/Day
Working Temperature Range	5°C - 38°C
Humidity Setting	10%RH-95%RH
Product Dimensions	410*436*835 mm
Packaging Dimensions	530*560*885mm
Net Weight	48Kg
Gross Weight	53 Kg
Refrigerant / Refrigerant Charge	R410A/ 8 0 0 g
Drainage Way	Water tank
Filter Material	Nylon
Drain Pipe Length	0.15 M
Loading Quantity(20'/40'/40'HQ)	80/ 176/ 264



Power Supply	220V/50Hz
Rated Current	6.2A
Rated Power	1300W
Dehumidification Capacity (30°C / 80%RH)/Day	150 L/Day
Working Temperature Range	5°C - 38°C
Humidity Setting	30%RH-90%RH
Product Dimensions	600*355*940 mm
Packaging Dimensions	698*465*1080 mm
Net Weight	55Kg
Gross Weight	60Kg
Refrigerant / Refrigerant Charge	R410A / 1200g
Drainage Way	Direct Drainage
Filter Material	Nylon
Drain Pipe Length	0.23M
Loading Quantity(20'/40'/40'HQ)	74/ 152/ 152

INDUSTRIAL SERIES DEHUMIDIFIER

CFZ series dehumidifier applies to large area, the initial area of a single unit can reach 200-1200 square meters, patented technology, strong dehumidification, high efficiency and energy saving

CFZ-6.8

INDUSTRIAL DEHUMIDIFIER



Custom Color



Efficient



LED Panel



Strong Body

Power Supply	220V/50Hz
Rated Current	8.3A
Rated Power	1800W
Dehumidification Capacity (30°C / 80%RH)/Day	164 L/Day
Working Temperature Range	5°C - 38°C
Humidity Setting	30%RH-90%RH
Product Dimensions	600*405*1612 mm
Packaging Dimensions	720*520*1750 mm
Net Weight	100Kg
Gross Weight	115Kg
Refrigerant / Refrigerant Charge	R22/ 1400g
Drainage Way	Direct Drainage
Filter Material	Nylon
Drain Pipe Length	1 M
Loading Quantity(20'/40'/40'HQ)	31/ 65/ 65

CFZ-10

INDUSTRIAL DEHUMIDIFIER



Custom Color



Efficient



LED Panel



Strong Body

Power Supply	380V3N/50Hz
Rated Current	6.3A
Rated Power	3500W
Dehumidification Capacity (30°C / 80%RH)/Day	240L/Day
Working Temperature Range	5°C - 38°C
Humidity Setting	30%RH-90%RH
Product Dimensions	770*470*1630mm
Packaging Dimensions	885*575*1750mm
Net Weight	155Kg
Gross Weight	175 Kg
Refrigerant / Refrigerant Charge	R2 2 / 1730g
Drainage Way	Direct Drainage
Filter Material	Nylon
Drain Pipe Length	1 M
Loading Quantity(20'/40'/40'HQ)	21/ 45/ 45

CFZ-20

INDUSTRIAL DEHUMIDIFIER



Custom Color



Efficient



LED Panel




Strong Body

Power Supply	380V3N/50Hz
Rated Current	12.6A
Rated Power	7000W
Dehumidification Capacity (30°C / 80%RH)/Day	480 L/Day
Working Temperature Range	5°C - 38°C
Humidity Setting	30%RH-90%RH
Product Dimensions	1225*450*1765mm
Packaging Dimensions	1360*600*1950 mm
Net Weight	235 Kg
Gross Weight	265 Kg
Refrigerant / Refrigerant Charge	R22/ 3000g
Drainage Way	Direct Drainage
Filter Material	Nylon
Drain Pipe Length	1.5 M
Loading Quantity(20'/40'/40'HQ)	13/ 27/ 27

CFZ-40

INDUSTRIAL DEHUMIDIFIER

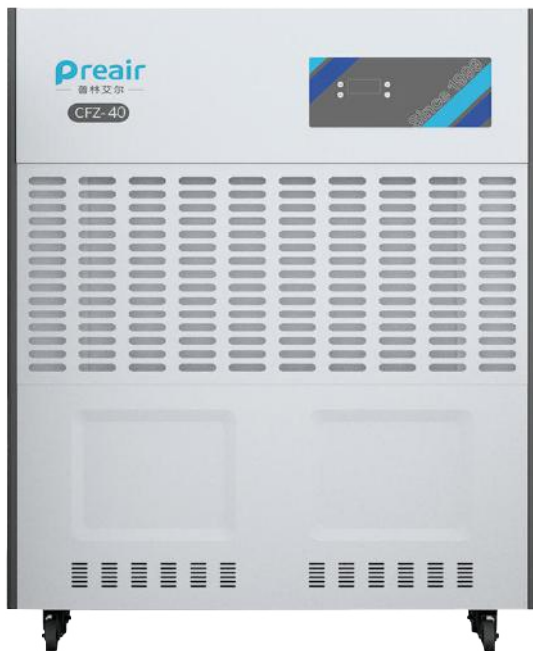

Custom Color



Efficient



LED Panel



Strong Body

Power Supply	380V3N/50Hz
Rated Current	24.7A
Rated Power	13800W
Dehumidification Capacity (30°C / 80%RH)/Day	960 L/Day
Working Temperature Range	5°C - 38°C
Humidity Setting	30%RH-90%RH
Product Dimensions	1435*528*1740mm
Packaging Dimensions	1540*732*1890mm
Net Weight	400Kg
Gross Weight	435Kg
Refrigerant / Refrigerant Charge	R22/ 6000g
Drainage Way	Direct Drainage
Filter Material	Nylon
Drain Pipe Length	1 M
Loading Quantity(20'/40'/40'HQ)	10/ 22/ 22

ZETA SERIES DEHUMIDIFIER

ZETA series dehumidifier wide range of use, suitable for plant greenhouse.

ZETA-145

DROPPED CEILING DEHUMIDIFIER



Custom Color



Wifi



LCD Panel



APP Control

Power Supply	220-240V/50Hz
Rated Current	5.8 A
Rated Power	1270 W
Dehumidification Capacity (30°C / 80%RH)/Day	145 L/Day
Working Temperature Range	5°C - 38°C
Humidity Setting	10%RH-90%RH
Product Dimensions	872*598*436 mm
Packaging Dimensions	940*675*580 mm
Net Weight	63Kg
Gross Weight	78Kg
Refrigerant / Refrigerant Charge	R410A / 1300g
Drainage Way	Direct Drainage
Filter Material	Nylon
Loading Quantity(20'/40'/40'HQ)	80 / 164 / 164

ZETA-240

DROPPED CEILING DEHUMIDIFIER



Custom Color



Wifi



LCD Panel



APP Control

Power Supply	380V/50Hz
Rated Current	4.8 A
Rated Power	2450 W
Dehumidification Capacity (30°C / 80%RH)/Day	240 L/Day
Working Temperature Range	5°C - 38°C
Humidity Setting	10%RH-90%RH
Product Dimensions	1040*780*858 mm
Packaging Dimensions	1140*820*865 mm
Net Weight	120Kg
Gross Weight	135Kg
Refrigerant / Refrigerant Charge	R410A / 3200g
Drainage Way	Direct Drainage
Filter Material	Nylon
Loading Quantity(20'/40'/40'HQ)	28 / 56 / 84

ZETA-480

DROPPED CEILING DEHUMIDIFIER



Power Supply	380V/50Hz
Rated Current	9.3 A
Rated Power	4700 W
Dehumidification Capacity (30°C / 80%RH)/Day	480 L/Day
Working Temperature Range	5°C - 38°C
Humidity Setting	10%RH-90%RH
Product Dimensions	1271*1040*835mm
Packaging Dimensions	1360*1145*890 mm
Net Weight	204Kg
Gross Weight	232Kg
Refrigerant / Refrigerant Charge	R410A / 6000g
Drainage Way	Direct Drainage
Filter Material	Nylon
Loading Quantity(20'/40'/40'HQ)	18 / 40 / 40



Custom Color



Wifi



LCD Panel



APP Control

HEATER

*Construction Site
Warehouse
Indoor Environment*

PH10

HEATER



Custom Color



Strong Body



Spin Button Control

Power Supply	400V/3ph/50Hz
Rated Current	4.3 / 7.5 / 12 A
Rated Power	3 / 6 / 9 KW
Air Flow	550 m³/h
Control Circuit Fuse	3.15 A
Temperature Increase at Max	Variable
Product Dimensions	557*344*453 mm
Packaging Dimensions	/ mm
Net Weight	24 Kg
Gross Weight	/ Kg
Sound Level	52 dB(A)
Protection Class	IP21

Loading Quantity(20'/40'/40'HQ)

/

FAN BLOWER



PA-LO-A1500

FAN



Custom Color



Strong Body



Spin Button Control

Power Input	220V-240V/50Hz
Power	112/156W
Current	0.5/0.7amp
Rpm	1550rpm
Air Volume	1500m ³ /h
Max Air Speed	16m/s
Distance	6.5m / 20'
Unit Size	550*420*215mm
Box Size	575*450*245mm
N.W.	10kg/8.6lbs

Loading QTY

20GP 480pcs
40GP 900pcs
40HQ 1100pcs